

1.5~5.0 ton Diesel

7LS SERIES

1.5~5.0ton

CT POWER



WARRANTY:12 MONTHS OR 1000 HOURS (OL) OF THE CLASSIS WHICHEVER COMES FIRST FROM THE B/L DATE



GLOBAL-POWER CO.,LTD.

TOYOTA TOYOTA INDUSTRIES GROUP
No.1 West First Xianggang Rd, Jiaoxi, Jiaozhou, Qingdao city, Shandong,China
Tel: +86-532-58573666 URL: www.c-power.com Email:export@tailift.com.cn

2025.03

CT POWER

Company profile



Welcome to GLOBAL-POWER CO.,LTD.

Tailift factory in Qingdao, China

ABOUT US

Tailift has been providing reliable and competitive material handling products for over 30 years. The origin of the Tailift Group dates back to 1973 in the machining tools industry in Taiwan.

The Tailift Group began designing and manufacturing forklifts in 1987 under the Tailift brand.

In 2001, the Tailift China factory with a registered English name, Global-Power Co., Ltd. was established, manufacturing and selling forklifts under the “Tailift” brand for the domestic Chinese market, and “CT Power” brand for the export market.

In 2015, the Tailift Group material handling division entered joint venture with TOYOTA Industries Corporation.

Tailift group has a unified R&D department between Taiwan and China and is one of the very few forklift manufacturers in China to design, patent and manufacture our own forklift transmission, offering performance, reliability and technical advantages over the competition. With an annual production capacity of 30,000 units, GLOBAL-POWER Co., LTD. (Tailift China division) has obtained CE and ISO 9001 certifications and has obtained good global reputation.

Our History

1973 President Steve Lin founded Lin-Da Industry (machinery) in Taiwan

1987 Enter material handling equipment industry and set up Tailift brand introduces 7L forklifts

1993 Tailift introduces electric forklift and patents Tailift transmission

1999 Tailift Group enters China Market

2001 Global-Power Co., Ltd. is established in Qingdao City

2003 Global-Power Co., Ltd. announces 7L electric forklifts

2013 Global-Power Co., Ltd. announces H series IC products and class 3 products

2015 Tailift Group material handling division and Toyota Industries Group enter joint venture

2020 New electric model 8L has been started, designed under the Toyota Industries ergonomic philosophy.

2022 New energy lithium-ion battery trucks based on engine model have been launched

2023 Tailift Group invested 132 million US dollars in building a new factory, which covers an area of 133,000 sqms and officially started production on March 1st, 2023.



North America
(Tailift Material Handling USA Inc.)

Sale Branch in Houston, TX (2008)



China
(Global-Power Co., Ltd.)

Factory in Qingdao, China (2001)



Taiwan
(Tailift Material Handling Taiwan Co., Ltd.)

Factory in Nantou, Taiwan (1996)



Qingdao Factory

Qingdao new factory, covers an area of 133,000 sqms, started from 2023



Eficient



► Overhead Guard

Strong and stable overhead guard protect the operator well.

Option



The comfortable seats, with the design of a back-rest equipped with armrests, make the drivers more comfortable and also ensure their safety.

► 7-Layer Durable Chain

The whole series adopts 7-layer chain, strong and durable, high safety performance, to ensure the safety of operation.

► Front Handrail

It is convenient for drivers to get in and out of the vehicle and ensures their safety.


► Double-acting Parking Brake

Prevent misoperation

► Side Shifter And Fork Positioner

Equipped with a side shifter and fork positioner which easy to cargo stacking.

Option




► LED Headlights



► Safety Headlights

Option



Project a blue light ring in the area approximately 3 meters behind the forklift. This alerts pedestrians that a forklift is reversing ahead, preventing accidents.

Option



There are three red lights installed on left, right, rear side respectively, which can show the specific position and driving route of the forklift, and effectively prevent the occurrence of accidents.


► Rear Handrail

The rear handrail is good to expand the field of view when backing up, which helps to drive safely.



► Wide-view Mast

The wide view frame gives the driver a good view and improves the safety of the operation.



► Small-diameter Adjustable Steering Wheel

Helps improve operability and reduce fatigue. Provide convenience and can customize to the operator's desired position.



► Solid Tires Feature High Abrasion Resistance

High load - bearing capacity, and excellent safety in use.





Variation

	1 1.5 ton		5 3.0 ton
	2 1.8 ton		6 3.5 ton
	3 2.0 ton		7 4.0 ton
	4 2.5 ton		8 5.0 ton

Colour

Standard ● Option ● ● ●



Comfortable Seat



Red Safety Area Lights




Blue Safety Light



Side Shifter



Fork Positioner

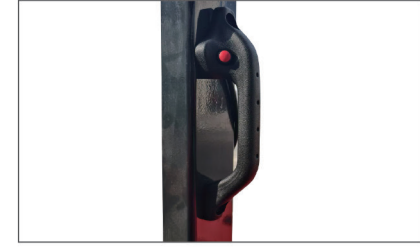

Rear Handrail With Horn

SPECIFICATION

					FD/G15			FD/G18			FD/G20					
CHARACTERISTICS	1	Manufacturer(Brand)			CT-Power			CT-Power			CT-Power					
	2	Series			7L			7L			7L					
	3	Model			FD15	FG15		FD18	FG18		FD20	FG20				
	4	Load capacity	A	Weight	kg	1500			1800			2000				
	5	Load center	B	Distance	mm	500			500			500				
	6	Power		Internal Combustion/Battery		Diesel	Gasoline		Diesel	Gasoline		Diesel	Gasoline			
	7	Operation		Stand on/Sit		Sit			Sit			Sit				
	8	Tire		P=Pneumatic S=Solid	Front/Rear	P/P			P/P			P/P				
	9	Wheels(X:Driving wheel)		Number	Front/Rear	2X/2			2X/2			2X/2				
DIMENSIONS	10	Duplex mast	C	Standard lifting height	mm	3000			3000			3000				
	11	Standard forks		Thickness(s) * width(e) * length(l)	mm	35x100x1070			35x100x1070			45x100x1070				
	12	Tilting angle		Front/Rear	deg	6°/12°			6°/12°			6°/12°				
	13	Overall dimensions	D	Fork to back of counterweight	mm	2235			2290			2525				
	14		E	Overall width	mm	1065			1065			1158				
	15		F	Lowered mast height	mm	2100			2100			2100				
	16		G	Max. height	mm	4220			4220			4220				
	17		H	Overhead guard height	mm	2130			2130			2145				
	18	Turning radius	J		mm	1950			1950			2170				
	19	Front overhang	K	Center of front axle to forks	mm	425			425			465				
PERFORMANCE	20	Speed	Driving	Full load	km/h	16	16	17	16	16	17	17	17	17	18	18
	Without load			km/h	17	17	18	17	17	18	18	18	18	19	19	
	21		Lifting	Full load	mm/s	460	460	550	460	460	510	550	550	550	550	530
	Without load			mm/s	560	560	600	560	560	600	650	620	620	620	600	
	22		Lowering	Full load	mm/s	450	450	450	450	470	470	470	470	470	470	470
Without load	mm/s	440		440	440	440	440	440	440	440	440	440	440	440		
WEI-GHT	23	Traction		Full load	N	14200	14200	14100	14200	14500	14300	17100	14900	14900	16500	14800
	24	Max.gradeability		Full load	%	25	25	25	25	25	25	25	23	23	25	23
			Without load	%	20	20	20	20	20	20	20	20	20	20	20	
	25	Standard weight		kg	3120	3120	3120	3200	3200	3220	3580	3580	3580	3500	3500	
	26	Tires		Number(front/rear)		2/2			2/2			2/2				
27			Front tires		6.50-10-10P.R.			6.50-10-10P.R.			7.00-12-12P.R.					
28			Rear tires		5.00-8-8P.R.			5.00-8-8P.R.			6.00-9-10P.R.					
BODY	29	Wheelbase	L		mm	1350			1380			1550				
	30	Tread	Wheel distance	Front	mm	885			885			970				
	Rear			mm	900			900			985					
	31	Groud Clearance	M	Full load Min.	mm	120			120			120				
	32		N	Full load wheel base center	mm	180			180			195				
33	Brake		Service brake		Hydraulic			Hydraulic			Hydraulic					
34			Parking brake		Manual			Manual			Manual					
DRIVING	35	Engine		Brand		ISUZU	YANMAR	NISSAN	ISUZU	YANMAR	NISSAN	YANMAR	ISUZU	XINCHAI	NISSAN	NISSAN
	36			Type		C240	4TNE92	K21	C240	4TNE92	K21	4TNE94	C240	490	K25	K21
	37			Rated Revolutions Per Minute	rpm	2500	2450	2300	2500	2450	2300	2200	2500	2650	2300	2300
	38			Rated power	Kw	34.6	33.4	32	34.6	33.4	32	34.2	34.6	36.8	37.4	32
	39			Cylinder/exhaust	No./cc	4/2369	4/2659	4/2065	4/2369	4/2659	4/2065	4/3054	4/2369	4/2670	4/2488	4/2065
	40			Fuel consumption	g/kw.h	260	235	285	260	235	285	245	260	225	285	285
	41	Gearbox		Class		AUTO			AUTO			AUTO				
	42	Servo pressure			kg/cm	175			175			185				

*Specification are subject to improvements&changes by Global-Power Co.,Ltd. without advanced notice.

FD/G25					FD30						FD/G35					FDX40	
CT-Power					CT-Power						CT-Power					CT-Power	
7L					7L						7L					7L	
FD25		FG25			FD30		FG30				FD35		FG35			FDX40	
2500					3000						3500					4000	
500					500						500					500	
Diesel		Gasoline			Diesel		Gasoline				Diesel		Gasoline			Diesel	
Sit					Sit						Sit					Sit	
P/P					P/P						P/P					P/P	
2X/2					2X/2						2X/2					2X/2	
3000					3000						3000					3000	
45x100x1070					45x122x1070						50x122x1070					50x122x1070	
6°/12°					6°/12°						6°/12°					6°/12°	
2545					2720						2890					2985	
1158					1280						1280					1400	
2100					2100						2100					2210	
4220					4220						4220					4220	
2145					2170						2170					2190	
2250					2400						2615					2800	
465					480						480					550	
18	18	18	17	17	18	18	18	18	18	18	18	18	18	18	18	18	
19	19	19	18	18	19	19	19	19	19	19	19	19	19	19	19	19	
530	500	500	520	500	460	440	460	460	460	430	410	410	410	400	300		
650	630	630	620	600	540	540	540	540	540	540	540	540	540	500	400		
470	470	470	470	470	450	450	450	450	450	450	450	450	450	450	450		
440	440	440	440	440	510	510	510	510	510	510	510	510	510	510	440		
17700	20000	20000	16700	13700	18300	2000	18300	2000	22000	18000	17900	2000	17900	17700	22000		
25	22	22	22	22	23	22	23	22	22	21	21	22	21	21	20		
20	20	20	19.5	19.5	20	20	20	20	20	20	20	20	20	20	20		
3800	3800	3800	3800	3800	4350	4350	4350	4350	4350	4350	4500	4350	4500	4500	5800		
2/2					2/2						2/2					2/2	
7.00-12-12P.R.					28*9-15-14P.R.						28*9-15-14P.R.					250-15-18P.R.	
6.00-9-10P.R.					6.50-10-10P.R.						6.50-10-10P.R.					7.00-12-12P.R.	
1550					1650						1850					1850	
970					1055						1055					1130	
985					985						985					1100	
120					120						120					130	
195					220						220					180	
Hydraulic					Hydraulic						Hydraulic					Hydraulic	
Manual					Manual						Manual					Manual	
YANMAR	ISUZU	XINCHAI	NISSAN	NISSAN	YANMAR	YANMAR	ISUZU	ISUZU	XINCHAI	NISSAN	YANMAR	YANMAR	ISUZU	NISSAN	YANMAR	ISUZU	
4TNE94	C240	490	K25	K21	4TNE98	4TNE94	4JG2	C240	490	K25	4TNE98	4TNE94	4JG2	K25	4TNE98	4JG2	
2200	2500	2650	2300	2300	2450	2200	2450	2500	2650	2300	2450	2200	2450	2300	2450	2450	
34.2	34.6	36.8	37.4	32	44.1	34.2	46	34.6	36.8	37.4	44.1	34.2	46	37.4	44.1	46	
4/3054	4/2369	4/2670	4/2488	4/2065	4/3319	4/3054	4/3059	4/2369	4/2670	4/2488	4/3319	4/3054	4/3059	4/2488	4/3319	4/3059	
245	260	225	285	285	269	245	265	260	225	285	269	245	265	285	269	265	
AUTO					AUTO						AUTO					AUTO	
185					185						185					175	

STANDARD & OPTION

● standard ▲ option

Capacity(kg)		1500	1800	2000	2500	3000	3500	4000	5000
Model		FD/G15	FD/G18	FD/G20	FD/G25	FD/G30	FD/G35	FD/G40	FD/G50
Engine	GCT GK21	● FG	● FG	/	/	/	/	/	/
	GCT GK25	/	/	● FG	● FG	● FG	● FG	/	/
	ISUZU C240	●	●	●	●	●	/	/	/
	ISUZU 4JG2	/	/	/	/	▲	●	●	/
	YANMAR 4TNE94L	/	/	▲	▲	▲	▲	/	/
	YANMAR 4TNE98L	/	/	/	/	▲	▲	▲	/
	KUBOTA V3800	/	/	/	/	/	/	/	●
LPG		▲ FG	▲ FG	▲ FG	▲ FG	▲ FG	▲ FG	/	/
Auto transmission		●	●	●	●	●	●	●	●
Mast	Duplex 3000mm	●	●	●	●	●	●	●	●
	Triplex 4500mm	▲	▲	▲	▲	▲	▲	▲	▲
	Triplex 4800mm	▲	▲	▲	▲	▲	▲	▲	▲
	Triplex 6000mm	▲	▲	▲	▲	▲	▲	▲	▲
	Other height	▲	▲	▲	▲	▲	▲	▲	▲
Control valve	2nd control valve	●	●	●	●	●	●	●	●
	3rd control valve	▲	▲	▲	▲	▲	▲	▲	▲
	4th control valve	▲	▲	▲	▲	▲	▲	▲	▲
Tire	Pneumatic	●	●	●	●	●	●	●	●
	Solid	▲	▲	▲	▲	▲	▲	▲	▲
	Eco-friendly solid	▲	▲	▲	▲	▲	▲	/	/
	Dual front	/	▲	▲	▲	▲	▲	▲	▲
Seat	Standard seat	●	●	●	●	●	●	●	●
	Deluxe seat	▲	▲	▲	▲	▲	▲	▲	▲
Forks	1070MM	●	●	●	●	●	●	▲	▲
	1220MM	▲	▲	▲	▲	▲	▲	●	●
	1370MM	▲	▲	▲	▲	▲	▲	▲	▲
	1520MM	▲	▲	▲	▲	▲	▲	▲	▲
	Other length	▲	▲	▲	▲	▲	▲	▲	▲
Multifunctional instrument		●	●	●	●	●	●	●	●
Maintenance-free battery		●	●	●	●	●	●	●	●
Front /rear LED lights		●	●	●	●	●	●	●	●
Reverse buzzer		●	●	●	●	●	●	●	●
Flashing warning light		●	●	●	●	●	●	●	●
Rearview mirror		●	●	●	●	●	●	●	●
Radiator	Aluminum	●	●	●	●	●	●	●	●
	Copper	▲	▲	▲	▲	▲	▲	▲	▲
Single air filter		●	●	●	●	●	●	●	●
Up-down handrail		●	●	●	●	●	●	●	●
Rear handrail		●	●	●	●	●	●	●	●
Rear handrail with a horn		▲	▲	▲	▲	▲	▲	▲	▲
Uni-body frame		●	●	●	●	●	●	●	●
Full hydraulic power steering		●	●	●	●	●	●	●	●
Lowing intelligence buffer		●	●	●	●	●	●	●	●
Tool kit		●	●	●	●	●	●	●	●
Blue warning light		▲	▲	▲	▲	▲	▲	▲	▲
Red safety spotlights		▲	▲	▲	▲	▲	▲	▲	▲
Wider fork carrier		▲	▲	▲	▲	▲	▲	▲	▲
Wider / higher backrest		▲	▲	▲	▲	▲	▲	▲	▲
Attachment	Fork positioner	▲	▲	▲	▲	▲	▲	▲	▲
	Side shifter	▲	▲	▲	▲	▲	▲	▲	▲
	Hinged forks	▲	▲	▲	▲	▲	▲	▲	▲
	Paper roll clamp	▲	▲	▲	▲	▲	▲	▲	▲
	Bale clamp	▲	▲	▲	▲	▲	▲	▲	▲
	Others	▲	▲	▲	▲	▲	▲	▲	▲
Dual air filter		▲	▲	▲	▲	▲	▲	▲	▲
Front wind shield		▲	▲	▲	▲	▲	▲	▲	▲
Up wind shield		▲	▲	▲	▲	▲	▲	▲	▲
Back wind shield		▲	▲	▲	▲	▲	▲	▲	▲
Air conditioner		▲	▲	▲	▲	▲	▲	▲	▲
Heater		▲	▲	▲	▲	▲	▲	▲	▲
Fan		▲	▲	▲	▲	▲	▲	▲	▲
Cabin		▲	▲	▲	▲	▲	▲	▲	▲
Others(Please consult your exclusive salesperson)									

*When selecting multiple options, it may not be possible to assemble them at the same time, please contact your local dealer for details.

LOAD CAPACITY-FD/G 15

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 15			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 15		
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)		
				500	800	1100					500	800	1100
TIRE	SINGLE TYPE	TWO STAGE	3000	1500	1130	910	TIRE	SINGLE TYPE	TWO STAGE	3000	1380	1040	840
			3300	1500	1130	910				3300	1380	1040	840
			3500	1500	1130	910				3500	1380	1040	840
			3700	1500	1130	910				3700	1380	1040	840
			4000	1500	1130	910				4000	1380	1040	840
			4500	1300	980	790				4500	1190	900	720
			5000	1200	910	730				5000	1000	760	610
		TWO STAGE (FFL)	3000	1500	1130	910			TWO STAGE (FFL)	3000	1380	1040	840
			3300	1500	1130	910				3300	1380	1040	840
			3500	1500	1130	910				3500	1380	1040	840
			3700	1500	1130	910				3700	1380	1040	840
			4000	1500	1130	910				4000	1380	1040	840
		THREE STAGE	4000	2950	2230	1790			THREE STAGE	4000	2770	2090	1680
			4300	2930	2210	1780				4300	2735	2070	1660
			4500	1250	950	760				4500	1140	860	690
			4700	2870	2170	1750				4700	2655	2010	1620
			4800	1200	910	730				4800	1050	790	640
			5000	1100	830	670				5000	900	680	550
			5500	800	610	490				5500	720	550	440
			6000	600	450	370				6000	530	400	320

LOAD CAPACITY-FD/G 18

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 18			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 18		
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)		
				500	800	1100					500	800	1100
TIRE	SINGLE TYPE	TWO STAGE	3000	1800	1360	1090	TIRE	SINGLE TYPE	TWO STAGE	3000	1660	1250	1010
			3300	1800	1360	1090				3300	1660	1250	1010
			3500	1750	1320	1060				3500	1620	1220	980
			3700	1700	1280	1030				3700	1570	1190	950
			4000	1650	1250	1000				4000	1520	1150	920
			4500	1490	1130	900				4500	1400	1060	850
			5000	1150	870	700				5000	1050	790	640
		TWO STAGE (FFL)	3000	1800	1360	1090			TWO STAGE (FFL)	3000	1660	1250	1010
			3300	1800	1360	1090				3300	1660	1250	1010
			3500	1750	1320	1060				3500	1600	1210	970
			3700	1700	1280	1030				3700	1520	1150	920
			4000	1650	1250	1000				4000	1460	1100	890
			4300	2950	2230	1790				4300	2770	2090	1680
			4500	2930	2210	1780				4500	2735	2070	1660
		THREE STAGE	4800	1450	1100	880			THREE STAGE	4800	1350	1020	820
			4700	2870	2170	1750				4700	2655	2010	1620
			4800	1250	950	760				4800	1150	870	700
			5000	1100	830	670				5000	1000	760	610
			5500	900	680	550				5500	800	610	490
			6000	700	530	430				6000	620	470	380

LOAD CAPACITY-FD/G 20

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 20			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 20				
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)				
				500	800	1100					500	800	1100		
TIRE	SINGLE TYPE	TWO STAGE	3000	2000	1530	1230	TIRE	SINGLE TYPE	TWO STAGE	3000	1850	1410	1140		
			3300	2000	1530	1230				3300	1850	1410	1140		
			3500	2000	1530	1230				3500	1850	1410	1140		
			3700	2000	1530	1230				3700	1850	1410	1140		
			4000	2000	1530	1230				4000	1850	1410	1140		
			4500	1800	1370	1110				4500	1660	1270	1020		
			5000	1400	1070	860				5000	1290	980	800		
		TWO STAGE (FFL)	3000	2000	1530	1230			TWO STAGE (FFL)	3000	1850	1410	1140		
			3300	2000	1530	1230				3300	1850	1410	1140		
			3500	2000	1530	1230				3500	1850	1410	1140		
			3700	2000	1530	1230				3700	1850	1410	1140		
			4000	2000	1530	1230				4000	1850	1410	1140		
			THREE STAGE	4000	2950	2280				1860	THREE STAGE	4000	2770	2140	1740
				4300	2930	2260				1840		4300	2735	2110	1720
		4500		1700	1310	1060			4500	1560		1200	980		
		4700		2870	2210	1800			4700	2655		2040	1660		
		4800		1550	1190	970			4800	1410		1090	880		
		5000		1300	1000	810			5000	1190		920	750		
	5500	1100		850	690	5500			980	750		610			
	6000	800		620	500	6000			720	550		450			
	DUALFRONT TYPE		6500	1200											
			7000	1000											

LOAD CAPACITY-FD/G 25

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 25			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 25				
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)				
				500	800	1100					500	800	1100		
TIRE	SINGLE TYPE	TWO STAGE	3000	2500	1910	1540	TIRE	SINGLE TYPE	TWO STAGE	3000	2320	1770	1430		
			3300	2500	1910	1540				3300	2320	1770	1430		
			3500	2500	1910	1540				3500	2320	1770	1430		
			3700	2500	1910	1540				3700	2320	1770	1430		
			4000	2500	1910	1540				4000	2320	1770	1430		
			4500	2000	1530	1230				4500	1850	1410	1140		
			5000	1500	1140	920				5000	1380	1050	850		
		TWO STAGE (FFL)	3000	2500	1910	1540			TWO STAGE (FFL)	3000	2320	1770	1430		
			3300	2500	1910	1540				3300	2320	1770	1430		
			3500	2500	1910	1540				3500	2320	1770	1430		
			3700	2500	1910	1540				3700	2320	1770	1430		
			4000	2500	1910	1540				4000	2320	1770	1430		
			THREE STAGE	4000	2950	2250				1820	THREE STAGE	4000	2770	2110	1710
				4300	2930	2240				1810		4300	2735	2090	1690
	4500	1900		1460	1190	4500		1750	1350	1100					
	4700	2870		2210	1800	4700		2655	2040	1660					
	4800	1600		1230	1000	4800		1450	1120	910					
	5000	1500		1160	940	5000		1380	1060	860					
	5500	1200		920	750	5500		1080	830	680					
	6000	850		650	530	6000		730	560	460					
	DUALFRONT TYPE	6500	1450												
		7000	1150												

LOAD CAPACITY-FD/G 30

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 30			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 30				
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)				
				500	800	1100					500	800	1100		
TIRE	SINGLE TYPE	TWO STAGE	3000	3000	2300	1860	TIRE	SINGLE TYPE	TWO STAGE	3000	2770	2120	1720		
			3300	3000	2300	1860				3300	2770	2120	1720		
			3500	3000	2300	1860				3500	2770	2120	1720		
			3700	3000	2300	1860				3700	2770	2120	1720		
			4000	3000	2300	1860				4000	2770	2120	1720		
			4500	2750	2110	1710				4500	2520	1930	1560		
			5000	2350	1800	1460				5000	2170	1660	1350		
		TWO STAGE (FFL)	3000	3000	2300	1860			TWO STAGE (FFL)	3000	2770	2120	1720		
			3300	3000	2300	1860				3300	2770	2120	1720		
			3500	3000	2300	1860				3500	2770	2120	1720		
			3700	3000	2300	1860				3700	2770	2120	1720		
			4000	3000	2300	1860				4000	2770	2120	1720		
		THREE STAGE	4000	2950	2260	1830			THREE STAGE	4000	2770	2120	1720		
			4300	2930	2240	1820				4300	2735	2090	1700		
			4500	2650	2040	1660				4500	2420	1860	1520		
			4700	2870	2210	1800				4700	2655	2040	1660		
			4800	2400	1850	1500				4800	2180	1680	1370		
			5000	2200	1690	1380				5000	2000	1540	1250		
	5500		1900	1460	1190	5500				1750	1350	1100			
	6000		1500	1160	940	6000				1370	1060	860			
	DUALFRONT TYPE		6500	1700											
		7000	1200												

LOAD CAPACITY-FD/G 35

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD/G 35			WITH SIDE SHIFTER	MAST TYPE	MAST HEIGHT (MM)	FD/G 35					
				LOAD CAPACITY(KG)						LOAD CAPACITY(KG)					
				500	800	1100				500	800	1100			
TIRE	SINGLE TYPE	TWO STAGE	3000	3500	2680	2170	TIRE	SINGLE TYPE	TWO STAGE	3000	3240	2480	2010		
			3300	3500	2680	2170				3300	3240	2480	2010		
			3500	3500	2680	2170				3500	3240	2480	2010		
			3700	3500	2680	2170				3700	3240	2480	2010		
			4000	3500	2680	2170				4000	3240	2480	2010		
			4500	2800	2140	1740				4500	2560	1960	1590		
			5000	2400	1840	1490				5000	2170	1660	1350		
		TWO STAGE (FFL)	3000	3500	2680	2170			TWO STAGE (FFL)	3000	3240	2480	2010		
			3300	3500	2680	2170				3300	3240	2480	2010		
			3500	3500	2680	2170				3500	3240	2480	2010		
			3700	3500	2680	2170				3700	3240	2480	2010		
			4000	3200	2450	1980				4000	3240	2480	2010		
			THREE STAGE	4000	2950	2260				1830	THREE STAGE	4000	2770	2120	1720
				4300	2930	2240				1820		4300	2735	2090	1700
	4500	2800		2160	1760	4500	2560	1970	1610						
	4700	2870		2210	1800	4700	2655	2050	1670						
	4800	2750		2120	1730	4800	2520	1940	1580						
	5000	2400		1850	1510	5000	2170	1670	1360						
5500	2000	1540		1250	5500	1790	1380	1120							
6000	1600	1230		1000	6000	1400	1080	880							
DUALFRONT TYPE	6500	1800													
	7000	1300													

LOAD CAPACITY-FD 40

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD 40			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD 40		
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)		
				600	900	1200					600	900	1200
TIRE	SINGLE TYPE	TWO STAGE	3000	4000	2900	2400	TIRE	SINGLE TYPE	TWO STAGE	3000	3573	2590	2140
			3300	4000	2900	2400				3300	3573	2590	2140
			3500	4000	2900	2400				3500	3573	2590	2140
			3700	4000	2900	2400				3700	3573	2590	2140
			4000	4000	2900	2400				4000	3573	2590	2140
			4500	3500	2530	2100				4500	3073	2230	1840
			5000	3000	2170	1800				5000	2573	1860	1540
		TWO STAGE (FFL)	3000	4000	2900	2400			TWO STAGE (FFL)	3000	3573	2590	2140
			3300	4000	2900	2400				3300	3573	2590	2140
			3500	4000	2900	2400				3500	3573	2590	2140
			3700	4000	2900	2400				3700	3573	2590	2140
			4000	3700	2680	2220				4000	3273	2370	1960
		THREE STAGE	4500	3100	2240	1860			THREE STAGE	4500	2800	2030	1680
			4800	2900	2100	1740				4800	2600	1880	1560
			5000	2700	1960	1620				5000	2400	1740	1440
			5500	2500	1810	1500				5500	2150	1560	1290
			6000	2000	1450	1200				6000	1750	1270	1050

LOAD CAPACITY-FD 50

STANDARD WITHOUT SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD 50			WITH SIDE SHIFTER		MAST TYPE	MAST HEIGHT (MM)	FD 50		
				LOAD CAPACITY(KG)							LOAD CAPACITY(KG)		
				600	900	1200					600	900	1200
TIRE	SINGLE TYPE	TWO STAGE	3000	5000	3980	3310	TIRE	SINGLE TYPE	TWO STAGE	3000	4514	3290	2730
			3300	5000	3980	3310				3300	4514	3290	2730
			3500	5000	3980	3310				3500	4514	3290	2730
			3700	5000	3980	3310				3700	4514	3290	2730
			4000	5000	3980	3310				4000	4514	3290	2730
			4500	4300	3420	2840				4500	3855	2810	2330
			5000	3900	3100	2580				5000	3473	2530	2100
		TWO STAGE (FFL)	3000	5000	3980	3310			TWO STAGE (FFL)	3000	4514	3290	2730
			3300	5000	3980	3310				3300	4514	3290	2730
			3500	5000	3980	3310				3500	4514	3290	2730
			3700	5000	3980	3310				3700	4514	3290	2730
			4000	5000	3980	3310				4000	4514	3290	2730
		THREE STAGE	4500	4000	3210	2670			THREE STAGE	4500	3555	2610	2180
			4800	3700	2960	2470				4800	3250	2390	1990
			5000	3600	2880	2410				5000	3073	2260	1880
			5500	3000	2400	2010				5500	2631	1930	1610
			6000	2400	1920	1600				6000	2066	1520	1270

MEMO